


额定载荷 Rated load	10、15、20、25、30t
精度等级 Accuracy class	0.3
灵敏度 Sensitivity	1.6±0.005mV/V
线性误差 Non-linearity	±0.3%F.S
滞后误差 Hysteresis error	±0.3%F.S
蠕变(30分钟) Creep(30min)	±0.05%F.S
零点温度影响 TC ZERO	±0.02%F.S/10°C
灵敏度温度影响 TC SPAN	±0.02%F.S/10°C
输入阻抗 Input resistance	750±10Ω
输出阻抗 Output resistance	702±3Ω
绝缘电阻 Insulation resistance	≥5000 MΩ
额定温度 Nominal Temp Range	-10~+40°C
工作温度范围 Service Temp Range	-30~+70°C
安全负载 Safe load limit	150%F.S
破坏负载 Breaking load	200%F.S
额定激励电压 Nominal of range excitation	10~12 V DC
密封等级 Protection Class	IP67
材料 Material	合金钢 Alloy Steel
电缆 Cable	Length:16m

接线图Wiring Schematic Diagram

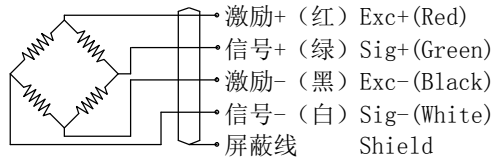

										宁波柯力传感科技股份有限公司		
										BTL-A10t~30t安装图		
设计										图样标记	重量	比例
校对										A		
审核										共张第张		
工艺										KL/JT-BTL-A10t~30t.0A		