


额定载荷 Rated load	1、2、3、5t
精度等级 Accuracy class	0.5
灵敏度 Sensitivity	0.7±0.1mV/V
线性误差 Non-linearity	±0.5%F.S
滞后误差 Hysteresis error	±0.5%F.S
蠕变(30分钟) Creep(30min)	±0.05%F.S
零点温度影响 TC ZERO	±0.1%F.S/10℃
灵敏度温度影响 TC SPAN	±0.1%F.S/10℃
输入阻抗 Input resistance	400±50 Ω
输出阻抗 Output resistance	352±3 Ω
绝缘电阻 Insulation resistance	≥5000 MΩ
工作温度范围 Service Temp Range	-30~+70℃
安全负载 Safe load limit	150%F.S
破坏负载 Breaking load	200%F.S
额定激励电压 Nominal of range excitation	10~12 V DC
密封等级 Protection Class	IP67
材料 Material	合金钢 Alloy Steel
电缆 Cable	Length:0.3m Diameter: Φ5mm

接线图Wiring Schematic Diagram

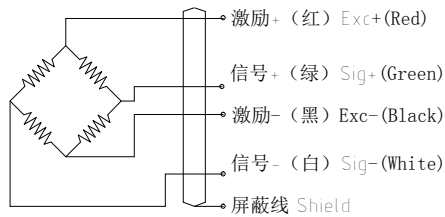

						宁波柯力传感科技股份有限公司		
						SCNEB-AX1t~5t 安装图		
设计				标准化		图样标记	重量	比例
校对				会签		A		
审核				审定				
工艺				批准		共张 第张		
						KL/JT-SCNEB-AX1t~5t. 0A		

旧底图图号	
底图总号	
签字	
日期	